



Multiple Sealing

Pressure tight up to 1 bar

High quality

Easy handling and installation

PSI Multiple Seal Kombi-C.P.



Pipeline Accessories


PSI Multiple sealing Kombi-C.P. Installation Instructions



You can fill the blind plug with pipes/cables from O.D. 4 to 32 mm. The sealing is pressure tight up to 1 bar. The system is devided and therefore suitable for installation with pipes/cables already installed.

For each opening we supply blind fillers which can be taken out when inserting the pipe/cable. Unused openings will be sealed with the blind fillers. This gives you the possibility to install other pipes/cables later.

For the installation you do not need any special tools beside a torque wrench.

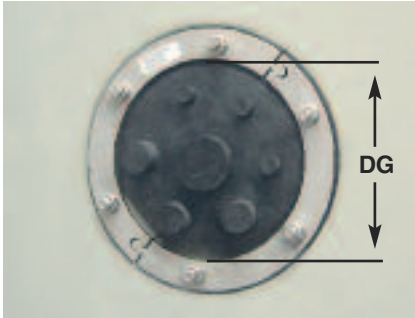

Overview

Core drilled hole mm	example number cable/pipe	O.D. example cable/pipe in mm	Product-Code
80 (43)	4	10	4-032-00001
	4	12	
100 (58)	4	15	4-032-00002
	5	12	
125 (82)	4	20	4-032-00003
	5	15	
150 (112)	4	30	4-032-00004
	5	25	

Installation:

Take off the devided pressure plates and cut the holes for the cables/pipes vertically with a knife. Now you can insert the in-situ pipes/cables in the rubber sealing plate. Then you have to bolt the pressure plates on the rubber and finish the installation in the wall.



Technical Data

Pressure plate:	V2A-devided
Pressure tight:	1 bar max.
Rubber thickness:	40 mm
Rubber material:	EPDM
Temperature range:	-30 up to +120 °C
Shore:	45 ± 5